


Pop

Color your business



Pop
by
Friulinox






Fresh or frozen

Temperature range:
+2°C | +10°C
-20°C | -10°C



Easy to use

Control interface with capacitive remote thermostat, simple and intuitive. HACCP alarms indication



100% Recyclable

Exterior made of steel or with skinplate treatment. Moulded polymer interior




Ideal for every installation

Tropicalised refrigeration unit (class "T" 43)




Shiny cleanliness

Very easy to clean and sanitise thanks to the rails moulded directly in the inner side panels



High insulation thickness

Less heat dispersion for less consumption



Multicolor

Unit available in 3 different colours – Black, Red and Stainless Steel to customer and characterise your location



Respect for the environment

Climate class 5 with ecological refrigerant R290

The cold storage specialists have developed a **new range of 700 l cabinets. Pop by Friulinox for conservation.** Multicolor: **black, red or stainless steel**, specific for the Delicatessen and Catering sector. Thanks to the different colours, they can blend in perfectly with exposed furnishings. Available in the **BT negative temperature versions for the conservation of frozen products** or **TN positive temperature versions for the conservation of refrigerated products**, they can accommodate 1/1 GN or 2/1 GN trays.



Features

- Monocoque construction.
- Steel external bottom, internal bottom moulded for containment.
- 80 mm ecological high-density WBS insulation.
- Cataphoresis-coated copper-aluminium evaporating coil.
- Painted condensing coil with high thermal efficiency, requires no cleaning.
- Openable instrument panel to facilitate periodic maintenance.
- Magnetic gasket on all four sides of the door and main body.
- Adjustable high-strength polymer feet H 120±160 mm.
- Automatic condensate evaporation and defrost device without the use of electricity.

- Climate class 5.
- Ecological refrigerant R290.
- Polymer interior with moulded side panels with 24 positions.

Standard accessories

- 3 GN 2/1 steel racks with food-grade coating.

Accessories


- 2 wheel kit with brake.

Model	Colour	Dimensions (L x D x H mm)	Grille capacity	Range Temperature	Refrigerant gas	Power (W)	Absorption (A)	Power supply (V/Ph/Hz)**
CRNO071A-R	Red	700 x 840 x 2090	24 x GN 2/1	+2/+10 °C	R290	132	0,6	220-240/1N~/50
CRNO071A-B	Black	700 x 840 x 2090	24 x GN 2/1	+2/+10 °C	R290	132	0,6	220-240/1N~/50
CRNO071A-X	Stainless steel	700 x 840 x 2090	24 x GN 2/1	+2/+10 °C	R290	132	0,6	220-240/1N~/50
CFNO071A-R	Red	700 x 840 x 2090	24 x GN 2/1	-20/-10 °C	R290	586	2,8	220-240/1N~/50
CFNO071A-B	Black	700 x 840 x 2090	24 x GN 2/1	-20/-10 °C	R290	586	2,8	220-240/1N~/50
CFNO071A-X	Stainless steel	700 x 840 x 2090	24 x GN 2/1	-20/-10 °C	R290	586	2,8	220-240/1N~/50

** Special voltages and frequencies on request

The guarantee for the quality of your products

The storage tables of Pop range refrigerated at positive or negative temperatures allow you to have multiple solutions in the layout of a kitchen. They are ideal allies for preparations and processing in small restaurants as well as in large ones, in delicatessens, butchers and fish markets, so that you always have the guarantee of products stored at the right temperature.




Fresh or frozen

Temperature range:

-2 °C / +10 °C

-20 °C / -10 °C



Ideal for every installation

Tropicalised refrigeration unit (class "T" 43)



Easy to use

Control interface with capacitive remote thermostat, simple and intuitive. HACCP alarms indication



Ghost Cooling System

Concealed cooling system with the advantage of ease of maintenance and cleaning thanks also to the rounded internal corners



Flexibility and practicality

Pull-out drawers with inner casing or support frame for the trays



Automatic unbrining

Automatic evaporation of the moisture



Respect for the environment

Climate class 5 Ecological refrigerant R290 (Plug-in version only)

Pop range Configuration



Ideal for every installation thanks to the multiple possibilities of combination according to your operational needs.


Each model, whether it's a single compartment or the largest one with four compartments, can be configured with: steel doors, one or more compartments with two pull-out refrigerated drawers H 200 mm deep or with three drawers with a depth of H 100 mm, as needed. All this applies to the two temperature versions, BT negative temperature for the storage of frozen products or TN positive temperature for the storage of

refrigerated products. As standard, they are equipped with condensing units on board on the right (on request also on the left) or alternatively, they can be arranged for connection to remote units.


The height of the top is 850 mm and they can all be tops without backsplash or with backsplash H 85 mm.




MOD.TRNO671A-P | MOD.TFNO671A-P

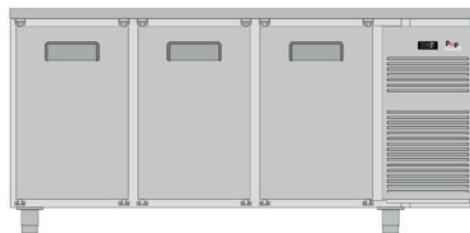

MOD.TRNO673A-P | MOD.TFNO673A-P

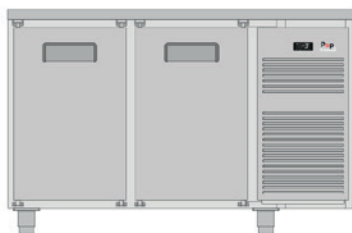

MOD.TRNO672A-P | MOD.TFNO672A-P

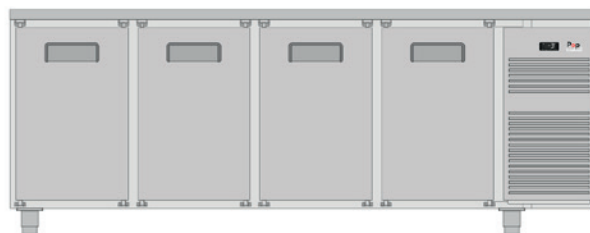

MOD.TRNO674A-P | MOD.TFNO674A-P

The range

Pop

Model	Dimensions (L x D x H mm)	Operating temperature	Cooling power (W)	Refrigerant gas	Power (W)	Absorption (A)	Power supply (V/Ph/Hz)
TRNO671A	840 x 685 x 810	-2 °C / +10 °C	362,5	R290	304	1,84	220-240/1N-/50
TFNO671A	840 x 685 x 810	-20 °C / -10 °C	354,2	R290	423,1	2,56	220-240/1N-/50
TRNO672A	1300 x 685 x 810	-2 °C / +10 °C	362,5	R290	304	1,84	220-240/1N-/50
TFNO672A	1300 x 685 x 810	-20 °C / -10 °C	354,2	R290	442,2	2,68	220-240/1N-/50
TRNO673A	1760 x 685 x 810	-2 °C / +10 °C	362,5	R290	304	1,84	220-240/1N-/50
TFNO673A	1760 x 685 x 810	-20 °C / -10 °C	354,2	R290	461,3	2,80	220-240/1N-/50
TRNO674A	2220 x 685 x 810	-2 °C / +10 °C	362,5	R290	304	1,84	220-240/1N-/50
TFNO674A	2220 x 685 x 810	-20 °C / -10 °C	354,2	R290	480,4	2,91	220-240/1N-/50

Pop - Set-up

Model	Dimensions (L x D x H mm)	Operating temperature	Cooling power (W)	Refrigerant gas	Power (W)	Absorption (A)	Power supply (V/Ph/Hz)
TRNO671-P	740 x 685 x 810	-2 °C / +10 °C	417	R134a	511,1	3,10	220-240/1N-/50
TFNO671-P	740 x 685 x 810	-20 °C / -10 °C	465	R452A	630,2	3,82	220-240/1N-/50
TRNO672-P	1200 x 685 x 810	-2 °C / +10 °C	417	R134a	511,1	3,10	220-240/1N-/50
TFNO672-P	1200 x 685 x 810	-20 °C / -10 °C	465	R452A	649,3	3,94	220-240/1N-/50
TRNO673-P	1660 x 685 x 810	-2 °C / +10 °C	417	R134a	511,1	3,10	220-240/1N-/50
TFNO673-P	1660 x 685 x 810	-20 °C / -10 °C	465	R452A	668,4	4,05	220-240/1N-/50
TRNO674-P	2120 x 685 x 810	-2 °C / +10 °C	417	R134a	511,1	3,10	220-240/1N-/50
TFNO674-P	2120 x 685 x 810	-20 °C / -10 °C	465	R452A	687,5	4,17	220-240/1N-/50

Features

- Monocoque construction with stainless steel exterior (Scotch Brite satin finish).
- Internal bottom moulded for containment.
- Cell with rounded corners for easy cleaning and perfect hygiene.
- 60 mm thick ecological high-density WBS insulation.
- Copper-aluminium evaporating coil, with cataphoresis treatment.
- Condensing battery with high thermal efficiency.
- Opening instrument panel for easy periodic maintenance (condenser cleaning).
- Magnetic seals on all four sides of the door and drawers.
- Ergonomic handle.
- Feet in stainless steel Ø 2".
- Ecological refrigerant R290 (only Plug-in version).
- Indirect ventilation.
- Automatic defrost device.
- Condensate evaporation without the use of electricity.
- Version set-up for ecological refrigerant R134a for TN units and R452a for

BT units.

- HACCP alarm management.
- Climate class 5.
- 2/3 drawers for module 1/1 GN and submultiples.
- As standard, technical compartment at the right (at the left on request).
- Table height with top H 850 mm, without top H 810 mm.
- Pull-out condensing unit drive.
- Removable grille-holders.
- Self-closing doors.

Standard accessories

- No. 1 grille with food grade coating GN 1/1 per module (version with doors).

Accessories

- 4 wheels, 2 with brake kit.

Pop

RF54LO0089-REV100124

FRIULINOX - ALI GROUP Srl a Socio Unico
Via Treviso 4 - 33083 Taiedo di Chions (PN) ITALY
Tel. +39 0434 635411 - Fax +39 0434 635414

info@friulinox.com | www.friulinox.com

See the full range at: www.friulinox.com
The data and information may change based on the continual development of products.

an Ali Group Company



The Spirit of Excellence