

TECHNICAL SHEET / SCHEDA TECNICA



# Ki-One Cart

K5

Cart



**TEKNĒITALIA**<sup>®</sup>

The Art of Quality



GELATO



# Ki-One Cart

TECHNICAL SHEET  
rev. 001/01102019

CODE 2860

V6 Dry convective system

## MEASURES/MISURE

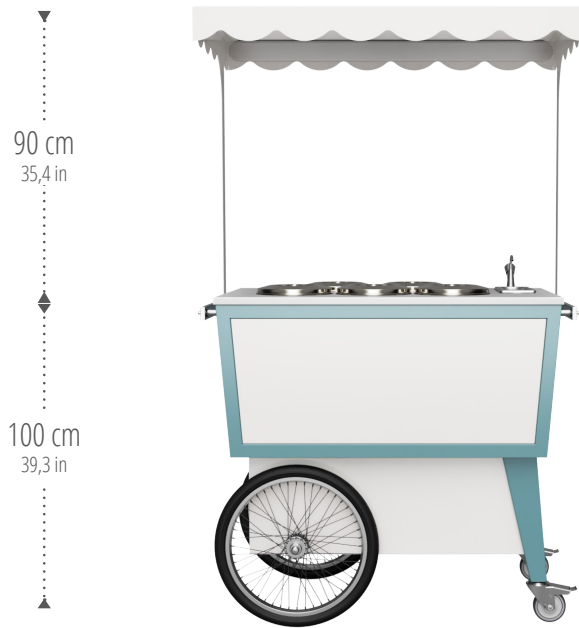


FIG. 1

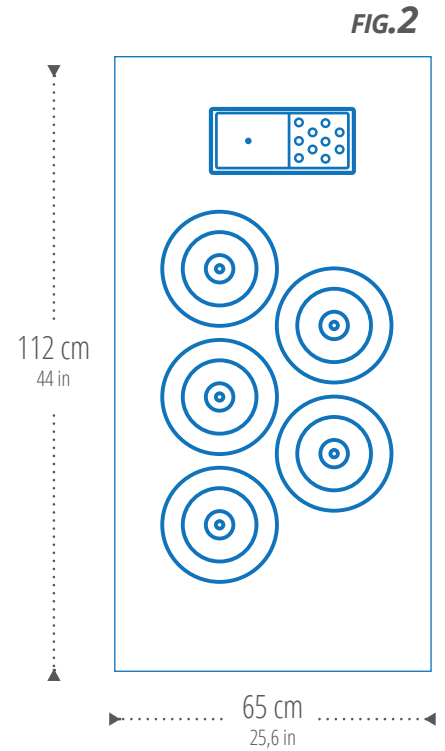


FIG. 2

## TECHNICAL SPECIFICATIONS

### CERTIFICATION



EMPTY WEIGHT KG

about 100 kg

100 circa

LOAD CAPACITY

5 Stainless steel tubs (5kg each). Total 25kg

5 carapine (5kg cad.) totale 25kg

OPERATING COLD ROOM TEMPERATURE

-25°/+5°C, -13°/+41° F

-25°/+5°C

CLIMATE CLASS

from 0° to 35°C

da 0° a 35°C

COLD AUTONOMY

Need to be plugged

Necessita di esser collegato

STANDARD FEATURE/DOTAZIONI STANDARD

BODY

Painted aluminium

Alluminio verniciato

OVERLAY

LIGHTING

WORKTOP

Galvanized steel

Acciaio galvanizzato

POWER SUPPLY

240V/50Hz or 110V/60Hz

240V/50Hz oppure 110V/60Hz

POWER CONSUMPTION

450W

450W

Subject to technical modifications

Mezzo soggetto a modifiche tecniche



TEKNĪTALIA®

**Glycol system**



**Models**


**Cooling System**




Injected polyurethane without HCFC/CFC  
Glycol refrigeration  
Condensing hermetic system with motor fan,  
temperature control, copper evaporator  
-25°/+5°C  
from 0° to 35°C  
6/7 hours




**PROCOPIO P6  
PROCOPIO P8  
PROCOPIO P3 SLIM  
PROCOPIO P4 SLIM  
PROCOPIO P4 XSLIM  
PROCOPIO P3 XSLIM  
DON COLA IN  
DON COLA FX  
DON GIOVANNI  
GEA IN  
ERMES**

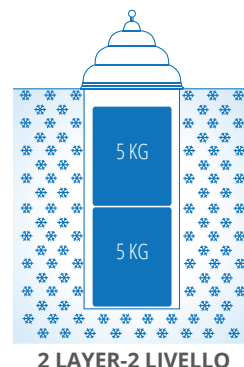

Poliuretano iniettato senza HCFC/CFC  
Refrigerazione a Glicole  
Sistema condensante ermetico con motoventilatore,  
controllo della temperatura, evaporatore in rame  
-25°/+5°C  
da 0° a 35°C  
6/7 ore



**KATERINA P6  
KATERINA P8  
KATERINA P4 SLIM  
KATERINA P6 SLIM  
DON COLA OUT  
GEA OUT  
ERMES  
NAXSOS P6**

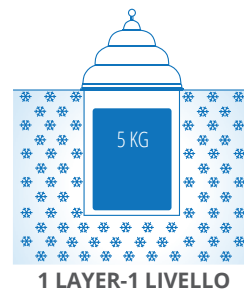

**Dry convective system**




**Models**



Injected polyurethane without HCFC/CFC  
Dry refrigeration  
Condensing hermetic system with motor fan,  
temperature control, copper evaporator  
-25°/+5°C  
from 0° to 35°C  
30 min



**PROCOPIO V6  
PROCOPIO V9  
NAXOS V6**

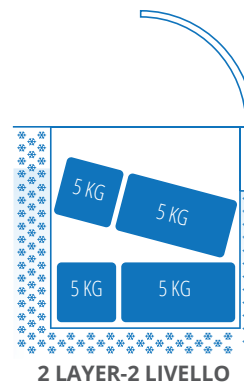

Poliuretano iniettato senza HCFC/CFC  
Refrigerazione a secco  
Sistema condensante ermetico con motoventilatore,  
controllo della temperatura, evaporatore in rame  
-25°/+5°C  
da 0° a 35°C  
30 min



**KATERINA V6  
KATERINA V6 SLIM**

